

10/15/99

J0715 U.S. PTO

Please type a plus sign (+) inside this box → ☐Approved for use through 09/30/2000. OMB 0851-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.UTILITY
PATENT APPLICATION
TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. CALT-2973
First Inventor or Application Identifier Lee J. Burrows
Title Ion Exchange Waveguides and Methods...
Express Mail Label No. EL100016887US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☐ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 38]
(preferred arrangement set forth below)
- Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the invention
 - Brief Summary of the invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 7]
4. Oath or Declaration [Total Pages 1]
- a. ☐ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

NOTE: FOR ITEMS 1 & 15 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY
FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.17), EXCEPT
IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.20).

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 [Copies of IDS Citations]
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity Statement filed in prior application, Status still proper and desired
(PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☐ Other:

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Labelor ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name David B. Ritchie
D'Alessandro & Ritchie

Address P. O. Box 640640

City San Jose State CA Zip Code 95164-0640

Country USA Telephone 408-441-1100 Fax 408-441-8400

Name (Print/Type) David B. Ritchie Registration No. (Attorney/Agent) 31,562

Signature [Signature] Date 15 OCT 1999

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:) Art Unit:
Lee J. Burrows)
) Examiner:
Serial No. [Not yet assigned])
)
Filed: October 15, 1999)
)
For: ION EXCHANGE WAVEGUIDES AND)
<u>METHODS OF FABRICATION</u>)

CERTIFICATE OF MAILING

"Express Mail" mailing label no: EL100016887US

Date of Deposit: October 15, 1999


I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR

1.10 on the date indicated above and is addressed to:

Box Patent Application

Assistant Commissioner for Patents

Washington, D.C. 20231


 Diane Morse
TRANSMITTAL LETTER

Honorable Assistant Commissioner
for Patents
Box Patent Application
Washington, D.C. 20231

Dear Sir:

Enclosed for filing please find the patent application for an invention entitled, "ION EXCHANGE WAVEGUIDES AND METHODS OF FABRICATION", filed on behalf of California Institute of Technology, assignee from inventor Lee J. Burrows, including Utility Patent Application Transmittal, 24 pages of specification, 13 pages of claims, 7 sheets of drawing figures, and 1 page of Abstract.

The attorney's Docket Number is CALT-2973.

Kindly address all communications regarding this application to:

David B. Ritchie
D'Alessandro & Ritchie
P.O. Box 640640
San Jose, CA 95164-0640
Telephone (408) 441-1100

No fee is being paid at this time.

Respectfully submitted,
D'ALESSANDRO & RITCHIE



David B. Ritchie
Reg. No. 31,562

Dated: October 15, 1999

D'Alessandro & Ritchie
P.O. Box 640640
San Jose, CA 95164-0640
(408) 441-1100

This application is submitted in the name of inventor Lee J. Burrows, assignor to the California Institute of Technology, a California Non-profit Corporation.

5

SPECIFICATION

ION EXCHANGE WAVEGUIDES AND METHODS OF FABRICATION

10

CROSS-REFERENCE TO RELATED APPLICATIONS

15

20

25

This is a continuation-in-part of co-pending United States patent application serial No. 09/309,361, filed May 11, 1999, and entitled, "Method for Pressurized Annealing of Lithium Niobate and Resulting Lithium Niobate Structures", by inventor Lee J. Burrows assignor to California Institute of Technology, a California non-profit corporation. Patent application serial No. 09/309,361 claims the benefit of provisional patent application Serial No. 60/084,940 filed May 11, 1998, and entitled "Pressurized Annealing of Lithium Niobate". This application is also related to U.S. Patent application Serial No. 09/_____, filed on even date herewith entitled "TITANIUM-INDIFFUSION WAVEGUIDES AND METHODS OF FABRICATION" by inventors Lee J. Burrows and William B. Bridges, both assignors to the California Institute of Technology; and U.S. Patent application Serial No. 09/_____, filed on even date herewith entitled "TITANIUM-INDIFFUSION WAVEGUIDES" by inventor Lee J. Burrows, assignor to the California Institute of Technology; and U.S. Patent application Serial No. 09/157,652 filed September 21, 1998 entitled "ARTICLES USEFUL AS OPTICAL WAVEGUIDES AND METHOD FOR MANUFACTURING SAME" by inventor Lee J. Burrows, assignor to the California Institute of Technology.

STATEMENT AS TO RIGHTS TO INVENTIONS

The United States Government has certain rights in this invention pursuant to Grant No. F-19628-95-C-0002 awarded by the United States Air Force.

5

BACKGROUND OF THE INVENTION

Field Of The Invention

The present invention relates to a method for fabricating ion exchange waveguides in optical modulators using pressurized annealing and the resulting waveguides and modulators. More particularly, the present invention relates to a method for fabricating lithium niobate-ion or lithium tantalate-ion exchange waveguides using a pressurized oxygen atmosphere anneal process to further diffuse ions in the exchange region.

15

Background

Optoelectronic components can be fabricated on several types of substrates including polymers, glass, semiconductors (e.g., gallium arsenide (GaAs) and indium phosphide (InP)) and inorganic materials (e.g., lithium niobate (LiNbO₃) and lithium tantalate (LiTaO₃)). Characteristically, an electro-optic material is one in which the index of refraction changes with the application of an electric field. One of the most important components in optoelectronic systems is the modulator. Three competing technologies in this realm are: direct modulation of a semiconductor laser, semiconductor electro-absorption modulators, and the lithium niobate modulator. Currently, lithium niobate modulators are the modulation devices of choice for many systems because they yield

25

high performance, are a relatively mature technology and other modulation schemes impose limits not faced with lithium niobate modulators.

Lithium niobate has proven to be a suitable medium for components such as
 5 amplitude modulators, phase modulators, optical switches, polarization transformers, tunable filters and wavelength-selective optical add/drop filters. Lithium niobate has also been used as the host for solid state lasers using rare earth ions, e.g., erbium. Most current telecommunication and cable television system applications for LiNbO_3 modulators involve discrete components for the optical transmitter subsystem. This
 10 configuration couples continuous wave lasers, typically diode-pumped YAG or erbium fiber oscillators, with lithium niobate external modulators and various wavelength and power stabilization components.

Lithium niobate is a popular nonlinear optical crystal for several reasons including
 15 its large electro-optic coefficients, the ease with which high quality optical waveguides are fabricated and its amenability to conventional integrated circuit processing techniques. High quality optical waveguides are those that possess low loss and relatively high power handling capabilities. Additionally, LiNbO_3 is a hard material, thus it is easily polished for fiber optical coupling which makes its use in optical network
 20 systems relatively uncomplicated. It is also a relatively inexpensive crystal, due in part to its long history of use in surface-acoustic-wave (SAW) filters for radio frequencies. By comparison, lithium tantalate LiTaO_3 is essentially interchangeable with lithium niobate as far as modulator characteristics are concerned, but the use of LiTaO_3 is often cost prohibitive because it is not as widely commercially used as LiNbO_3 . Additionally, other
 25 optical crystalline structures having the formula RMO_3 , where R is an alkaline earth

metal, M is a Group IVB or Group VB metal, and O is oxygen, can also be used in the fabrication of waveguides and modulators.

For example, one type of modulator incorporating the use of LiNbO_3 is a Mach-Zehnder modulator. In a Mach-Zehnder modulator an incoming optical beam is split equally at a Y junction into two parallel waveguides, which then recombine at another Y junction after some distance. Electrodes are used to apply an electric field in the region of the optical waveguides. The electric field causes a relative phase shift between the two branches. If the phase shift in both arms is the same, then the two optical signals will recombine constructively at the second Y branch and no optical power will be lost. If there is a phase difference between the two arms, then there will be destructive interference and some optical power will be lost. The resulting destructive and constructive interference causes the output optical intensity to vary between a minimum and a maximum value.

In other electro-optic applications optical waveguide directional couplers can also be used as electro-optic modulators. In this type of modulator two waveguides are placed on the lithium niobate substrate in very close proximity to one another. The wave from one guide can “leak” into the other guide. By applying an electric field to the lithium niobate, the amount of “leakage” can be controlled, thus modulating the transfer of power from one guide to the other. Currently, different commercial application requirements favor either directional couplers or Mach-Zehnder modulators.

The advance of high-speed, large bandwidth, digital and analog communications has led to a demand for the external modulator configuration. The most common

approach utilizes a low-noise, high power diode-pumped laser whose signal is sent to the LiNbO_3 modulator via optical fiber. The modulator applies either analog or digital information to the optical carrier.

5 When using lithium niobate in the fabrication of optical waveguides and optical modulators it is desired to avoid having a niobium-rich, lithium-poor and/or oxygen poor composition. When bulk lithium niobate has such niobium rich-compositions, and is then processed at high temperatures ($T > 300$ degrees Celsius), growth of the LiNb_3O_8 phase in the crystal may occur. This phase is undesirable because it is not optically
10 transparent and leads to high losses in optical waveguides and optical modulators.

Such niobium-rich compositions can occur in two different manners during fabrication of optical waveguides and optical modulators. First, typical ion exchange procedures result in the replacement of lithium atoms in the crystal lattice with a
15 diffusing ion leading to a lithium niobate composition relatively rich in niobium. Second, standard high temperature (temperatures in excess of 300 degrees Celsius) processing of lithium niobate can cause Li_2O out-diffusion, and result in niobium-rich, and lithium and oxygen poor compositions.

20 To eliminate the undesired LiNb_3O_8 phase from forming in the crystal, high temperature processing, such as the stress relieving anneal process, is usually performed in a wet atmosphere of inert carrier gas, such as nitrogen (N_2) or argon (Ar_2), or in a wet atmosphere of oxygen (O_2). This type of anneal process involves bubbling the inert carrier gas or oxygen gas through water (H_2O). The wet atmosphere has been
25 considered beneficial in the past because the H_2O breaks down into H^+ and OH^- ions

which chemically attack the LiNb_3O_8 phase and break it back down into LiNbO_3 . A typical wet atmosphere anneal operation is performed at a temperature of about 350 degrees Celsius for a period of 5 to 6 hours in a wet, flowing environment. The present inventor has discovered that a drawback of this type of high temperature processing is that the H_2O gives off undesirable protons (H^+) which are attracted by the lithium niobate and result in an inadvertent proton-exchanged surface layer occurring. These protons remain in the modulators after fabrication and flow relatively freely among the waveguides, the electrodes, the lithium niobate crystal and the buffer layer interface. It is now understood that these free flowing protons can and do adversely affect a modulator's DC-bias stability because they act as charge carriers and are driven by the applied electric fields, causing the response of the final product to drift over time when a bias is applied.

Additionally, high temperature processing (> 300 degrees Celsius) leads to oxygen out-diffusion of lithium niobate structures. This out-diffusion tends to form a surface layer on a lithium niobate substrate or a lithium niobate waveguide that is oxygen poor in composition. This oxygen poor region acts as a surface optical waveguide and causes undesirable leakage of light out of the lithium niobate substrate.

Ion exchange waveguides have typically been fabricated by treating or exchanging the surface of the crystalline substrate with a source of ions. In most applications the exchanging has been performed with protons in the form of an acid, such as sulfuric acid or benzoic acid. The exchanging allows for the initial diffusion to take place, resulting in up to about 50% ion exchange (i.e., the ions replace the alkaline earth metal atoms in the crystal lattice). The initial exchanging process is then followed

by a procedure that will further diffuse the ions and drive the diffusion region farther into the depth of the crystalline substrate. Ion exchange can also be accomplished by using alkaline earth metal salt (i.e., lithium salt) as a buffer to the exchanging acid. Salt treatments are inefficient because they are time prohibitive, some salt treatments can take
5 upwards of 48 hours. Standard wet anneal processes introduce undesirable protons which are attracted by the crystalline substrate and result in an inadvertent proton exchanged surface layer occurring.

It would therefore be highly advantageous to devise a fabrication method for ion
10 exchange waveguides that uses a new high temperature annealing process that inhibits both the formation of the undesirable LiNb_3O_8 phase in the crystal and outdiffusion of O_2 without the process introducing significant numbers of free flowing protons that will affect the modulator's DC-bias stability.

BRIEF DESCRIPTION OF THE INVENTION

A method for fabricating ion exchange waveguides, such as lithium niobate or lithium tantalate waveguides in optical modulators and other optical waveguide devices,
20 utilizes pressurized annealing to further diffuse and limit exchange of the ions and includes ion exchanging the crystalline substrate with a source of ions and annealing the substrate by pressurizing a gas atmosphere containing the lithium niobate or lithium tantalate substrate above normal atmospheric pressure, heating the substrate to a temperature ranging from about 150 degrees Celsius to about 1000 degrees Celsius,
25 maintaining pressure and temperature to effect greater ion diffusion and limit exchange,

and cooling the structure to an ambient temperature at an appropriate ramp down rate.

In another aspect of the invention a powder of the same chemical composition as the crystalline substrate is introduced into the anneal process chamber to limit the crystalline substrate from outgassing alkaline earth metal oxide during the anneal period. In yet

- 5 another aspect of the invention an anneal container is provided that allows for crystalline substrates to be annealed in the presence of powder without contaminating the substrate with the powder during the anneal process. Waveguides manufactured in accordance with the method exhibit superior drift performance.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGS. 1A - 1G are cross-sectional views of various stages in the fabrication of a lithium niobate ion exchange optical modulator that incorporates pressurized oxygen atmosphere annealing in accordance with a one embodiment of the present invention.

FIG. 2A is a cross-sectional view of a container used for annealing lithium niobate structures in an environment having lithium niobate powder in accordance with one embodiment of the present invention.

FIG. 2B is a cross-sectional view of a pressurizable vessel used for annealing lithium niobate in accordance with one embodiment of the present invention.

FIG. 3 is a process flow diagram of a process for fabricating structures in accordance with a recently preferred embodiment of the present invention.

DETAILED DESCRIPTION OF THE PRESENT INVENTION

Those of ordinary skill in the art will realize that the following description of the present invention is illustrative only and is not intended to be in any way limiting. Other
5 embodiments of the invention will readily suggest themselves to such skilled persons from an examination of the within disclosure.

In accordance with one presently preferred embodiment of the present invention a method is provided for fabricating an ion exchange lithium niobate (LiNbO_3) optical
10 modulator. Pressurized annealing is used to further diffuse ions in the waveguide as is detailed below. Ion exchange fabrication involves altering one or more refractive indices (e.g., the extraordinary and ordinary refractive indices) of the crystal substrate in the region where the ion diffusion occurs to create an optical waveguide. The following exemplary description of the modulator fabrication process is intended to limit the
15 introduction of undesirable free protons into the fabrication process. FIGS. 1A - 1G are cross sectional views of a modulator after completion of selected steps in the fabrication process.

The present invention may also be defined as a method for fabricating an ion
20 exchange lithium tantalate (LiTaO_3) optical modulator. Lithium tantalate is closely related in terms of electro-optical properties to LiNbO_3 but is not currently widely used in commercial electro-optical modulator applications because to do so would be cost prohibitive. The same or similar pressurized anneal process as described below for LiNbO_3 would be employed in the annealing of LiTaO_3 . Additionally, the crystal
25 substrate that is used to form the optical modulator may be formed from a crystalline

structure having the formula RMO_3 , where R is an alkaline earth metal, M is a Group IVB or Group VB metal, and O is oxygen.

Referring to FIG. 1A, a modulator build 10 (a partially fabricated modulator) is shown after the formation of a mask layer 14 over the LiNbO_3 crystal substrate 12. The mask layer 14 may comprise silicon oxide (SiO_2), chromium oxide (Cr_2O_3), aluminum oxide (Al_2O_3) or another suitable masking layer material. Preferably, the mask material should be robust enough to withstand exposure to acids conceivably introduced in later processing. The use of such masking layer materials are well known by those of ordinary skill in the art. Mask layer 14 may be formed by using conventional plasma deposition, sputtering or thermal evaporation techniques, all of which are well known by those of ordinary skill in the art.

In FIG. 1B, standard photolithography techniques are used to place a photo resist layer 16 over the mask layer 14. As shown in FIG. 1B the photolithography process will result in the formation of channels in the photoresist in those areas where waveguides are to be fabricated. The use of such photolithography techniques are well known by those of ordinary skill in the art.

Referring to FIG. 1C a conventional plasma etch or reactive ion etch (RIE) technique is preferably then employed to form channels 18 through the mask layer 14 exposing the LiNbO_3 crystal substrate 12. The channel widths can be of a dimension suitable for the intended wavelength of the constrained wave. For example, for a 1.3 micron Optical Signal channel widths of from about 5 microns to about 7 microns are presently preferred. A plasma etch or RIE procedure is preferably chosen so that it

selectively etches away the material chosen as mask layer 14. It should be noted that the etch process should preferably avoid wet etching. Wet etching generally involves the use of acids and thus would generally be likely (unless deuterated acids are used) to introduce free protons into the waveguide scheme that would adversely affect the

5 LiNbO_3 . As previously discussed, free protons in the waveguide tend to increase the likelihood of output voltage drift over time.

Once the plasma etch or RIE process is completed it may be desirable to strip away residual photoresist. However, in some instances the photoresist will be robust

10 enough to withstand exposure to acidic materials and thus no stripping process needs to be employed. If an optional stripping process is used it may be accomplished with an oxygen plasma or by using an acetone wash. The use of acids for stripping purposes should be avoided as they have a tendency to introduce free protons into the modulator construct and these free protons increase the likelihood of latent drift in the modulators.

15 Referring to FIG. 1D, shown is the modulator build 10 after undergoing initial ion exchange diffusion. The exposed LiNbO_3 crystal substrate 12 is treated with an acid, preferably a deuterated acid, such as deuterated sulfuric acid (D_2SO_4), deuterated benzoic acid ($\text{C}_7\text{D}_6\text{O}_2$) or another suitable deuterated acid. Deuterated sulfuric acid may

20 be obtained in pure concentration from the Alfa Aesar Corporation of Ward Hill, Massachusetts and other vendors.

The use of deuterated acids in the diffusion process is beneficial for providing stability and immobility to the crystal lattice structure. The deuterium atom has an

25 additional neutron in the presence of a hydrogen atom, and has a mass approximately

twice that of a normal hydrogen atom. Since deuterium ions are heavier they possess higher activation energies and pose a lesser likelihood of moving out of the binding site than do the lighter hydrogen ions. Additionally, deuterium ions are closer in size to the lithium atoms than hydrogen ions. Individual protons (H^+) which differ in size and valence number from the replaced lithium atoms, have a tendency to impart more mobility to the crystal lattice. As a result of this mobility, the optical waveguides and the refractive index tend to drift over time, which alters the output intensity of the waveguide. However, when deuterium ions diffuse into the lithium niobate crystal structure and replace lithium atoms they tend to "lock down" in the crystal lattice and provide for more overall stability in the lattice. Note that tritium (H^3) could advantageously be used instead of deuterium (H^2) and should be considered as equivalent. Due to military restrictions, however, tritium is not widely commercially available in significant quantities.

The first initial diffusion occurs with ions replacing up to about 50% of the lithium atoms in the initial exchange region 20. The depth of the initial ion diffusion region 20 will be dependant upon the cut of the crystal, the optical wavelength and whether the waveguide is single-mode or multi-mode. For an optical modulator having Z-cut $LiNbO_3$ crystal, a single mode and an optical wavelength of 1300 nanometers, the initial ion exchange region 20 is typically about 0.4 microns in depth. The initial diffusion can be accomplished by immersing the modulator build 10 in a vented ion exchange chamber having the appropriate acid at the desired temperature. In general the ion exchange chamber will have the acid held at a temperature between about 160 degrees Celsius and about 240 degrees Celsius. The diffusion soak time will last from about 5 minutes to about 270 minutes. The temperature and time of the initial diffusion

process will be dependant upon the acid used and the ability to achieve about 35% to about 50% lithium exchange to a depth of about 0.4 microns in LiNbO_3 crystal substrate 12. The diffusion coefficient will vary dependant upon the pH of the acid used, the temperature of the acid bath and the duration of the diffusion soak.

5

Note that after initial ion exchange and prior to anneal the percentage of Lithium atoms in the waveguide area exchanged for deuterons will be on the order of about 50%. After anneal the percentage will be lowered to about 12% but cover a larger volume. Note that beneficial effects occur with concentrations of deuterons in excess of about 1%.

10

A more complete discussion of how diffusion depths and percentages are calculated in relation to time, temperature and pH is omitted from this disclosure in order to avoid overcomplicating the disclosure. See, for example, co-pending U.S. Patent Application Ser. No. 09/157,652 filed on September 21, 1998, in the name of inventor Lee J. Burrows, entitled "Articles Useful as Optical Waveguides and Method for Manufacturing Same" for a disclosure of an appropriate discussion of calculating diffusion depths and percentages. That disclosure is hereby expressly incorporated herein by reference as if set forth fully herein.

15
20

Once the initial diffusion process is completed, the photoresist layer 16 and the mask layer 14 may be removed by subjecting modulator build 10 to a suitable stripping procedure. A suitable stripping process may be accomplished with techniques well known in the art such as oxygen plasma etching or by using an acetone wash. The use of acids for stripping purposes should be avoided as they have a tendency to introduce

25

free protons into the modulator construct and these free protons increase the likelihood of latent drift in the modulators. This stripping procedure may be performed after the initial diffusion soak or after the subsequent anneal process. After the initial diffusion soak or, if warranted, after the photo resist stripping process residual acids may be
5 washed off with a suitable solvent such as propenyl or acetone.

Following the initial diffusion process the waveguide undergoes a pressurized anneal process that serves to further diffuse the ion exchange and drive the ions into greater depths within LiNbO₃ crystal substrate 12. As shown in FIG. 1E, the resulting
10 pressurized anneal process will result in the ions having an ion exchange region 22 with a penetration depth of about 6 microns and less than or equal to about 12% of the lithium atoms in ion exchange region 22 will have been replaced with ions. The resulting ion exchange region 22 has one or more refractive indices that differ from the refractive index of the untreated LiNbO₃ crystal substrate 12. Preferably ion exchange
15 region 22 exhibits no decrease to a slight increase in extraordinary refractive index relative to the bulk of the untreated LiNbO₃ crystal substrate 12. Ion exchange region 22 is capable of constraining a propagating wave such that the wave propagates through ion exchange region 22 and is not scattered or diffused through the bulk of the untreated LiNbO₃ crystal substrate 12. Preferably modulator build 10 exhibits the
20 property of allowing a wave propagating through the build to be modulated by an external force.

In accordance with another embodiment of the present invention, prior to the anneal process the modulator build 10 may be placed in a container that allows for
25 lithium niobate powder to be placed in close proximity to lithium niobate substrate 12.

Within the container the modulator build 10 and the lithium niobate powder are isolated by a porous interface that allows gas to flow between the lithium niobate structure and the lithium niobate powder but does not allow for the lithium niobate powder to contaminate modulator build 10. The container is closed by slip fit caps that allow for oxygen gas to enter into the container when a pressure differential exists yet restricts the outward flow of lithium oxide (Li_2O) in the absence of a pressure differential.

The purpose of the lithium niobate powder is to induce lithium oxide (Li_2O) outgassing in the lithium powder during the anneal process while retarding the same outgassing in LiNbO_3 crystal substrate 12. As previously discussed lithium niobate will outgas Li_2O when exposed to temperatures in excess of 300 degrees Celsius. The outgassing leads to a lithium niobate substrate that is poor in lithium. Lithium poor structures are prone to the LiNb_3O_8 phase forming in the crystal. The LiNb_3O_8 phase is not optically transparent and causes high losses in waveguides. The lithium niobate powder has a much larger surface area being a collection of granules rather than a monolithic structure and is generally more reactive than LiNbO_3 crystal substrate 12; therefore outgassing will occur more readily in the lithium niobate powder. Once the anneal environment is saturated with Li_2O outgassed from the powder, LiNbO_3 crystal substrate 12 is less likely to outgas Li_2O .

Shown in FIG. 2A is a cross-sectional illustration of such an annealing container 100 having both a modulator build and lithium niobate powder contained within. This illustration is shown by way of example, other containers that meet this intent and purpose are also feasible and within the inventive concepts herein disclosed. The container 100 is a tube-like structure that may be fabricated from a high temperature

ceramic material such as aluminum oxide (Al_2O_3). The modulator build 102 is placed in the center region of the tube and two porous plugs 104 are positioned within the tube a short distance from the tube endings. The porous plugs 104 may comprise any high-temperature material such as Al_2O_3 or a similar material. By way of example, the porosity of porous plugs 104 may be defined by the material having a plurality of holes of diameter on the order of about 20 microns. Plugs 104 allow for the relatively free flow of O_2 and Li_2O gases between the chamber 106 housing the LiNbO_3 crystal and the chamber(s) 108 housing the lithium niobate powder. Once the plugs 104 are positioned within the container 100, lithium niobate powder 110 is placed in one end or both ends of the plugged container 100. The amount of lithium niobate powder used will be dependant on the internal area of the sealable container. By way of example, the amount of the lithium niobate powder may be 2.5 grams for a tube having a volume of about 1.0 in^3 to about 2.0 in^3 . Once the lithium niobate powder 110 has been properly positioned in the tube, the tube is capped at both ends with loose slip fit caps 112 that are typically formed from the same high temperature material as container 100. Slip fit caps 112 will allow oxygen gas to enter container 100 when a pressure differential exists yet restrict the outward flow of Li_2O during the anneal process when the environment is pressure normalized (i.e. no significant pressure gradient exists).

Additionally, other anneal containers can also be configured. For example, an anneal container having one chamber or region for containing modulator build 102, a second region containing lithium niobate powder 110 and a porous wall or plug 104 separating the two regions is also feasible and within the inventive concepts herein disclosed.

Once the container of FIG. 2A is properly assembled it can be placed within a sealable and pressurizable vessel 120. A cross-sectional view of such a vessel is shown in FIG. 2B, enclosing the container 100 of FIG. 2A. The pressurizable vessel 120 is typically formed from a metal material such as stainless steel or a quartz or ceramic tube with pressure fittings on it. In this illustration vessel 120 is tube-like in structure and has fittings 122 and 124 at opposite ends of vessel 120. Fitting 122 is a fixed fitting and fitting 124 allows for vessel 120 to be vacuum pumped and pressurized with oxygen gas.

Additionally, annealing with lithium niobate powder can be undertaken without the use of the container, such as the one shown in FIG. 2A. It is also possible and within the inventive concept herein disclosed to place the lithium niobate powder directly in pressurized vessel 120. However, the quantity of required lithium niobate powder increases substantially when the powder is placed directly inside the pressurized vessel, making this alternate embodiment, in most instances, more costly.

The anneal process begins by placing modulator build 100 in a conventional annealing oven. Any suitable oven can be used as the annealing chamber and the use of such ovens are widely known by those of ordinary skill in the art. It is possible to use an anneal oven that has pressurizing capabilities in which case the use of the separate pressurizable vessel of FIG. 2B would be unnecessary. Upon placing the lithium niobate structure into the oven, the oven or pressurizable vessel is sealed and then the oven or pressurizable vessel is vacuum pumped down to approximately 100 microns pressure or less to eliminate contaminants from the annealing environment. The vacuum pump down procedure is optional and in some instances the need to remove

contaminants from the annealing environment may not be of concern. If the slip fit caps 112 do not make a good seal to the container 100 or if the plugs 104 do not make a good fit with the inside of container 100, creating a pressure differential across them may have the undesirable result of causing turbulence which deposits some powder 110 on chip 102. To avoid this, the vacuum step may be avoided and pressurized gas blown through the oven from port 124 (Fig. 2B) to port 122 (Fig. 2B) to eliminate most important contaminants without causing movement of powder 110. Once the oven or pressurizable vessel has been sealed and optionally vacuumed it is then pressurized with oxygen gas (O_2). This oxygen need not be particularly pure and industrial or cutting grade oxygen as used with acetylene torches will suffice. The pressurized oxygen atmosphere serves to prevent oxygen outgassing. It should be noted that the atmosphere is a pure oxygen gas environment, no H_2O is present and thus no free protons or other radicals are given off that would adversely affect the $LiNbO_3$. The pressure in the O_2 atmosphere may be raised to just above ambient atmospheric pressure to about 250 psi above ambient atmospheric pressure. An optimal anneal pressure range is from about 1 psi to about 25 psi above ambient atmospheric pressure, preferably about 6 psi above ambient atmospheric pressure. Applications have shown that annealing at pressures above 25 psi tends to cause the $LiNbO_3$ to turn green in color. While the green discoloration does not appear to affect the structure negatively, to avoid this discoloration pressures below 25 psi above ambient atmospheric pressure should be used.

While oxygen (O_2) is presently preferred and provides the best results, the following gasses may also be used with slight reduction in performance: Nitrogen (N_2),

Argon (Ar), Helium (He). Purities on these gasses may also be the same as for O₂, i.e., industrial purities.

Once the oxygen pressurization has been implemented in the anneal chamber the temperature in the oven is then raised to the appropriate level that affects the necessary degree of ion exchange or stress relief desired. In general, the temperature can be raised to about 100 degrees Celsius to about 600 degrees Celsius. A temperature of about 300 degrees Celsius will generally allow for the necessary further ion diffusion into required depths of the lithium niobate crystal substrate. Temperatures above 1000 degrees Celsius are generally undesirable because they allow for further undesirable phase changes to occur in the LiNbO₃ crystal. A preferable anneal temperature is about 300 degrees Celsius. It is generally advisable to anneal at lower temperatures to control the depth of ion exchange. However, higher temperature anneals at this stage can be conducted and would decrease the anneal time accordingly. The ramp up rate for elevating the temperature in the oven may be in the range of about 0.5 degrees Celsius per minute to about 20.0 degrees Celsius per minute. The preferred ramp up rate is 10 degrees Celsius per minute.

The required duration of the anneal process will depend upon the temperature at which the annealing takes place. For a higher temperature anneal process a shorter anneal period is required and for a lower temperature anneal process a longer anneal period is required. The anneal period is measured from the time at which the desired elevated temperature is reached. In general, the anneal process will last from about 4 hours to about 8 hours. Longer anneal times are possible but are not commercially acceptable. Shorter anneal times are possible but will require higher anneal

temperatures. The desired elevated temperature and elevated pressure should be maintained throughout the duration of the anneal process. Preferably the anneal process will last approximately 6 hours.

5 The anneal process is completed by cooling the lithium niobate structure in a rapid manner. The ramp down rate for the crystal structure may be from about 0.5 degrees Celsius per minute to about 40 degrees Celsius per minute. A presently preferable ramp down rate for the crystal structure is 20 degrees Celsius per minute. A 20 degrees per minute ramp down rate can be achieved by opening the anneal oven to a
10 room environment while continuing to blow oxygen across the surface of modulator build. Faster ramp down rates decrease the likelihood of LiNb_3O_8 forming during the cool down process.

As shown in FIG. 1E, the resulting presently preferred pressurized anneal process
15 will result in the ions having an ion exchange region 22 with a penetration depth of about 6 microns and less than or equal to about 12% of the lithium atoms in ion exchange region 22 will have been replaced with ions.

As shown in FIG. 1F, once the secondary anneal process is completed and after a
20 strip operation has removed mask layer 14 and photo resist layer 16, a buffer layer 24 is placed over the entire modulator build 10. Buffer layer 24 serves as insulation and is generally about 500 to about 10000 angstroms in thickness, preferably about 3000 angstroms. Buffer layer 24 may comprise silicon oxide (SiO_2), silicon nitride (Si_3N_4 or other phases), a combination of silicon oxide and silicon nitride, indium tin oxide (ITO) or
25 another suitable insulator material. Prior to placing buffer layer 24 over the waveguides

and the crystal substrate a strip operation may be employed to remove the waveguide template (i.e. mask layer 14 and buffer layer 16). The strip operation can be accomplished using an oxygen plasma, an acetone wash, PVD etch or another suitable technique that does not introduce the use of acids into the fabrication process. A conventional deposition technique, such as sputtering, may be used to place buffer layer 24 over modulator build 10. It should be noted that the use chemical vapor deposition (CVD) techniques should be avoided as such processing tends to generate undesirable free protons.

Referring to FIG. 1G, the modulator build 10 is completed by placing electrodes 26 above the buffer layer 24. As shown, electrodes 26 can be placed directly above waveguide regions 22 or they may be placed at other locations atop buffer layer 24. As is known by those of ordinary skill in the art, Z orientation modulators will have electrodes formed directly above the waveguides and X or Y orientation modulators will have electrodes formed offset from the waveguides. Standard deposition techniques are used to form electrodes 26 above buffer layer 24. A standard deposition technique may include a photoresist process, a conventional plasma deposition, sputtering or thermal evaporation process, a plasma etch process and a strip and acetone or propenyl wash process to eliminate the photoresist. The electrodes may be formed from gold (Au), chromium gold, titanium and gold or other suitable electrode materials. The use of chromium and titanium in combination with gold or as a pure thin layer between buffer layer 24 and electrode 26 is for the purpose of increasing adhesion between the gold and the buffer layer.

Once the electrodes have been fabricated the modulator build 10 undergoes a post build anneal process to relieve stress in the crystal, the electrodes and/or the buffer layer. In some instances, this anneal process may also preferably be performed after the formation of buffer layer 24. This pressurized anneal process is referred to as the primary
 5 anneal process that all modulator builds undertake as part of standard modulator fabrication. Lithium niobate has inherently high stress coefficients and relieving stress is essential to assure that output drift does not occur in the modulators. This pressurized anneal process has been discussed in detail above. The preferred anneal temperature is about 300 degrees Celsius. The preferred anneal atmosphere is oxygen (O_2) at about 6
 10 psi above ambient atmospheric pressure although a range of pressure above ambient from about 1 psi to about 25 psi above ambient atmospheric pressure will work. The preferred anneal time is about 4 hours to about 6 hours. The anneal process may incorporate the use of powdered lithium niobate to lessen the likelihood of modulator build 10 outgassing Li_2O .

15
 FIG. 3 summarizes the fabrication procedures detailed above. At reference number 120 the substrate is etched while avoiding the introduction of free protons. At reference number 122 ions (preferably deuterated ions) are introduced into the etched regions of the substrate. At reference number 124 the ions are diffused into the
 20 substrate. At reference number 126 the substrate is placed into a passive vessel. At reference number 128 the pressure vessel is pressurized (preferable with O_2). At reference number 130 the substrate temperature is ramped up to the maximum anneal temperature. At reference number 132 the substrate is held at maximum anneal temperature and pressure for the duration of the anneal period. At reference number 134
 25 the substrate is cooled at a ramp down rate back to ambient. At reference number 136

the vessel is depressurized and the substrate removed. At reference number 138 electrode(s) are optionally formed on the surface of the substrate. An additional anneal procedure may also then be performed.

5 Alternative Embodiments

Although illustrative presently preferred embodiments and applications of this invention are shown and described herein, many variations and modifications are possible which remain within the concept, scope and spirit of the invention, and these variations would become clear to those skilled in the art after a perusal of this application. The invention, therefore, is not limited except in spirit of the appended claims.

CLAIMSWhat is claimed is:

1. A method for fabrication of an ion exchange waveguide, the method
5 comprising:
ion exchanging with a source of ions a lithium niobate (LiNbO_3) substrate;
and
annealing to further diffuse the ion exchange in the lithium niobate
substrate by heating in a sealed gas atmosphere to an anneal temperature within a range
10 of about 100 degrees Celsius to about 1000 degrees Celsius, pressurizing the gas
atmosphere to exceed ambient atmospheric pressure, maintaining temperature and
pressure for an anneal period, and cooling to room temperature after the anneal period.
2. The method of claim 1 wherein ion exchanging with a source of ions
15 further comprises ion exchanging with a source of deuterated ions.
3. The method of claim 2 wherein the source of deuterated ions is deuterated
sulfuric acid.
- 20 4. The method of claim 2 wherein the source of deuterated ions is deuterated
benzoic acid.

5. The method of claim 1 wherein said ion exchanging further comprises:

immersing the lithium niobate substrate in an ion exchange bath having a source of ions at an ion exchange temperature of about 160 degrees Celsius to about 240 degrees Celsius; and

5 holding the lithium niobate substrate in said ion exchange bath for a period of about 5 minutes to about 270 minutes to effect about 35 percent to about 50 percent alkaline earth metal atom exchange.

6. The method of claim 1 wherein said annealing further comprises heating

10 occurring at a rate within the range of about 0.5 degrees Celsius per minute to about 20 degrees per minute.

7. A method in accordance with claim 1 wherein the anneal temperature is

15 limited to a maximum value within a temperature range of about 100 degrees Celsius to about 600 degrees Celsius.

8. A method in accordance with claim 1 wherein the anneal temperature is

limited to a maximum value of about 300 degrees Celsius.

20 9. The method of claim 1 wherein said pressurizing includes pressurizing the

oxygen gas atmosphere to a pressure within a range of about 1 psi above ambient atmospheric pressure to about 25 psi above ambient atmospheric pressure.

10. The method of claim 1 wherein said pressurizing includes pressurizing the oxygen gas atmosphere to a pressure of about 6 psi above ambient atmospheric pressure.

5 11. The method of claim 1 wherein said cooling includes cooling the substrate at a rate within a range of about 0.5 degrees Celsius per minute to about 40 degrees Celsius per minute.

12. The method of claim 1 wherein said cooling includes cooling the substrate
10 at a rate of about 20 degrees Celsius per minute.

13. The method of claim 1 wherein said annealing further comprises annealing in an environment comprising lithium niobate powder.

14. A method for annealing a lithium niobate substrate, the method comprising:
15 heating said lithium niobate substrate in an environment having lithium niobate powder disposed therein.

15. A method for annealing lithium niobate (LiNbO_3) structures, the method
20 comprising:

heating a lithium niobate structure in an oxygen gas (O_2) and lithium niobate powder environment to a maximum anneal temperature;

pressurizing the sealed oxygen gas atmosphere to exceed ambient atmospheric pressure;

maintaining temperature and pressure for a period of at least about 4 hours;
and
cooling the structure to ambient temperature.

5 16. The method of claim 15 wherein said maximum anneal temperature is in a
range of about 100°C to about 1000°C.

17. The method of claim 15 wherein said maximum anneal temperature is in a
range of about 300 degrees Celsius to about 600 degrees Celsius.

10

18. The method of claim 15 wherein said maximum anneal temperature is about
300 degrees Celsius.

15

19. The method of claim 15 wherein said pressurizing includes pressurizing the
oxygen gas atmosphere to a pressure within a range of about 1 psi above ambient
atmospheric pressure to about 25 psi above ambient atmospheric pressure.

20

20. The method of claim 15 wherein said pressurizing includes pressurizing the
oxygen gas atmosphere to a pressure of about 6 psi above ambient atmospheric
pressure.

21. The method of claim 15 wherein said cooling includes cooling the
substrate from the maximum anneal temperature at a rate within a range of rates of about
0.5 degrees Celsius per minute to about 40 degrees Celsius per minute.

25

22. The method of claim 15 wherein said cooling includes cooling the substrate from the maximum anneal temperature at a rate of about 20 degrees Celsius per minute.

5 23. A method for fabrication of an ion exchange waveguide, the method comprising:

ion exchanging with a source of ions a lithium tantalate (LiTaO_3) substrate;

and

annealing to further diffuse the ion exchange in the lithium tantalate substrate by heating in a sealed gas atmosphere to an anneal temperature within a range of about 100 degrees Celsius to about 1000 degrees Celsius, pressurizing the gas atmosphere to exceed ambient atmospheric pressure, maintaining temperature and pressure for an anneal period, and cooling to room temperature after the anneal period.

10 24. The method of claim 23 wherein ion exchanging with a source of ions further comprises ion exchanging with a source of deuterated ions.

15 25. The method of claim 24 wherein the source of deuterated ions is deuterated sulfuric acid.

20 26. The method of claim 24 wherein the source of deuterated ions is deuterated benzoic acid.

25

27. The method of claim 23 wherein said ion exchanging further comprises:

immersing the lithium tantalate substrate in an ion exchange bath having a source of ions at an ion exchange temperature of about 160 degrees Celsius to about 240 degrees Celsius; and

5 holding the lithium tantalate substrate in said ion exchange bath for a period of about 5 minutes to about 270 minutes to effect about 35 percent to about 50 percent alkaline earth metal atom exchange.

28. The method of claim 23 wherein said annealing further comprises heating

10 occurring at a rate within the range of about 0.5 degrees Celsius per minute to about 20.0 degrees per minute.

29. A method in accordance with claim 23 wherein the anneal temperature is

15 limited to a maximum value within a temperature range of about 100 degrees Celsius to about 600 degrees Celsius.

30. A method in accordance with claim 23 wherein the anneal temperature is

limited to a maximum value of about 300 degrees Celsius.

31. The method of claim 22 wherein said annealing further comprises

20 pressurizing to within a pressure range of about 1 psi above ambient atmospheric pressure to about 25 psi above ambient atmospheric pressure.

32. The method of claim 23 wherein said pressurizing includes pressurizing the oxygen gas atmosphere to a pressure of about 6 psi above ambient atmospheric pressure.

5 33. The method of claim 23 wherein said cooling includes cooling the substrate at a rate within a range of about 0.5 degrees Celsius per minute to about 40 degrees Celsius per minute.

10 34. The method of claim 23 wherein said cooling includes cooling the substrate at a rate of about 20 degrees Celsius per minute.

35. The method of claim 23 wherein said annealing further comprises annealing in an environment comprising lithium tantalate powder.

15 36. A method for annealing a lithium tantalate substrate, the method comprising:
heating said lithium tantalate substrate in an environment having lithium tantalate powder disposed therein.

20 37. A method for annealing lithium tantalate (LiTaO_3) structures, the method comprising:
heating a lithium tantalate structure in gas and lithium tantalate powder environment to a maximum anneal temperature;
pressurizing the sealed gas atmosphere to exceed ambient atmospheric
25 pressure;

maintaining temperature and pressure for a period of at least about 4 hours;
and
cooling the structure to ambient temperature.

5 38. The method of claim 37 wherein said maximum anneal temperature is in a
range of about 100°C to about 1000°C.

39. The method of claim 37 wherein said maximum anneal temperature is in a
range of about 100 degrees Celsius to about 600 degrees Celsius.

10

40. The method of claim 37 wherein said maximum anneal temperature is about
300 degrees Celsius.

15

41. The method of claim 37 wherein said pressurizing is to within a pressure
range of about 1 psi above ambient atmospheric pressure to about 25 psi above ambient
atmospheric pressure.

42. The method of claim 37 wherein said pressurizing is to a pressure of about
6 psi above ambient atmospheric pressure.

20

43. The method of claim 37 wherein said cooling occurring within a range of
rates of about 0.5 degrees Celsius per minute to about 40 degrees Celsius per minute.

44. The method of claim 37 wherein said annealing further comprises cooling
25 at a rate of about 20 degree Celsius per minute.

45. A method for fabrication of an ion exchange waveguide, the method comprising:

ion exchanging a crystalline substrate with a source of ions, the substrate
5 being a composition having the formula RMO_3 where R is an alkaline earth metal, M is a Group IVB or Group VB metal and O is oxygen; and

annealing to further diffuse the ions in the crystalline substrate by heating
the substrate in a sealed gas atmosphere to a maximum anneal temperature, pressurizing
the sealed gas atmosphere to exceed ambient atmospheric pressure, maintaining
10 temperature and pressure for an anneal period, and cooling the substrate to ambient
temperature.

46. A method in accordance with claim 42 wherein the maximum anneal
temperature is in a range of about 100°C to about 1000° .

47. The method of claim 45 wherein said ion exchanging is accomplished with
a source of deuterated ions.

48. The method of claim 47 wherein the source of deuterated ions is
20 deuterated sulfuric acid.

49. The method of claim 47 wherein the source of deuterated ions is
deuterated benzoic acid.

50. The method of claim 45 wherein said ion exchanging further comprises:

immersing the crystalline substrate in an ion exchange bath having a

5 source of ions at an ion exchange temperature in a range of about 160 degrees Celsius to about 240 degrees Celsius; and

holding the crystalline substrate in said ion exchange bath for a period in a range of about 5 minutes to about 270 minutes to effect about 35 percent to about 50 percent alkaline earth metal atom exchange.

10

51. The method of claim 45 wherein said heating further comprises heating the substrate to the maximum anneal temperature at a rate within a range of about 0.5 degrees Celsius per minute to about 20.0 degrees per minute.

OFFICIAL RECORD

15

52. The method of claim 45 wherein said maximum anneal temperature is within a temperature range of about 300 degrees Celsius to about 600 degrees Celsius.

53. The method of claim 45 wherein said maximum anneal temperature is about 300 degrees Celsius.

20

54. The method of claim 45 wherein said pressurizing includes pressurizing the sealed atmosphere to a pressure within a range of about 1 psi above ambient atmospheric pressure to about 25 psi above ambient atmospheric pressure.

55. The method of claim 45 wherein said pressurizing includes pressurizing the sealed atmosphere to a pressure of about 6 psi above ambient atmospheric pressure.

56. The method of claim 45 wherein said cooling includes cooling the
5 substrate from the maximum anneal temperature at a rate in a range of about 0.5 degrees Celsius per minute to about 40 degrees Celsius per minute.

57. The method of claim 45 wherein said cooling includes cooling the
substrate from the maximum anneal temperature at a rate of about 20 degrees Celsius per
10 minute.

58. The method of claim 45 wherein said annealing further comprises
annealing in an environment comprising a powder formed of RMO_3 ;

59. A method for annealing a crystalline substrate having the formula RMO_3
15 where R is an alkaline earth metal, M is a Group IVB or Group VB metal and O is oxygen, the method comprising:

heating said crystalline substrate in an environment having powder also
formed of RMO_3 .

60. An annealing container comprising:
a region containing a crystalline substrate to be annealed;
a second region containing a powder, said powder being of the same
composition as the crystalline substrate; and

a porous wall separating said first region from said second region, said wall allowing for the free flow of gas between said first region and said second region.

61. A container in accordance with claim 60 wherein said first region includes
 5 a first opening, said second region includes a second opening and further comprising:
 a first and second cap that respectively fit loosely over said first and
 second openings, wherein said caps allows for gas to flow into the container when a
 pressure differential exists between an interior and an exterior of the container and said
 caps restrict the flow out of said container of gas outgassed during an anneal process
 10 when no such pressure differential exists.

62. An ion exchange waveguide, comprising:
 a substrate formed of RMO_3 where R is an alkaline earth metal, M is a
 Group IV B or Group V B metal and O is oxygen;
 15 a waveguide disposed in said substrate; and
 deuterons disposed in said waveguide and exchanged for at least 1% of
 the R atoms in the substrate.

63. A waveguide according to claim 62 wherein said substrate comprises
 20 lithium niobate.

64. A waveguide according to claim 62 wherein said substrate comprises
 lithium tantalate.

25 65. The method of claim 1 wherein said gas is oxygen (O_2).

66. The method of claim 1 wherein said gas is one or more gasses selected from the groups consisting of Nitrogen (N_2), Argon (Ar), Helium (He) and Oxygen (O_2).

5 67. The method of claim 23 wherein said gas is oxygen (O_2).

68. The method of claim 23 wherein said gas is one or more gasses selected from the groups consisting of Nitrogen (N_2), Argon (Ar), Helium (He) and Oxygen (O_2).

10 69. The method of claim 37 wherein said gas is oxygen (O_2).

70. The method of claim 37 wherein said gas is one or more gasses selected from the groups consisting of Nitrogen (N_2), Argon (Ar), Helium (He) and Oxygen (O_2).

15 71. The method of claim 45 wherein said gas is oxygen (O_2).

72. The method of claim 45 wherein said gas is one or more gasses selected from the groups consisting of Nitrogen (N_2), Argon (Ar), Helium (He) and Oxygen (O_2).

ABSTRACT

A method for fabricating ion exchange waveguides, such as lithium niobate or
5 lithium tantalate waveguides in optical modulators and other optical waveguide devices,
utilizes pressurized annealing to further diffuse and limit exchange of the ions and
includes ion exchanging the crystalline substrate with a source of ions and annealing
the substrate by pressurizing a gas atmosphere containing the lithium niobate or lithium
tantalate substrate above normal atmospheric pressure, heating the substrate to a
10 temperature ranging from about 150 degrees Celsius to about 1000 degrees Celsius,
maintaining pressure and temperature to effect greater ion diffusion and limit exchange,
and cooling the structure to an ambient temperature at an appropriate ramp down rate.
In another aspect of the invention a powder of the same chemical composition as the
crystalline substrate is introduced into the anneal process chamber to limit the crystalline
15 substrate from outgassing alkaline earth metal oxide during the anneal period. In yet
another aspect of the invention an anneal container is provided that allows for
crystalline substrates to be annealed in the presence of powder without contaminating
the substrate with the powder during the anneal process. Waveguides manufactured in
accordance with the method exhibit superior drift performance.

10


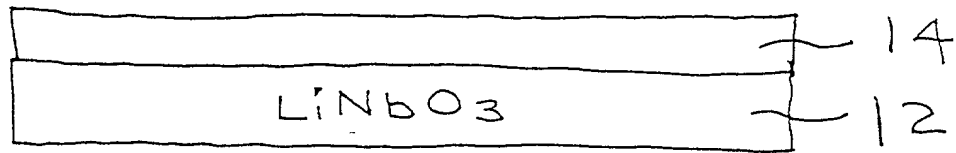



FIG. 1A

10

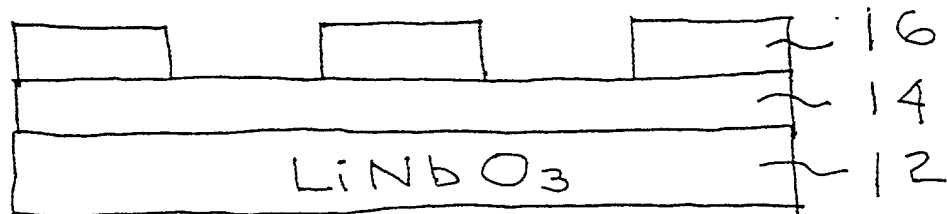



FIG. 1B

657074687US

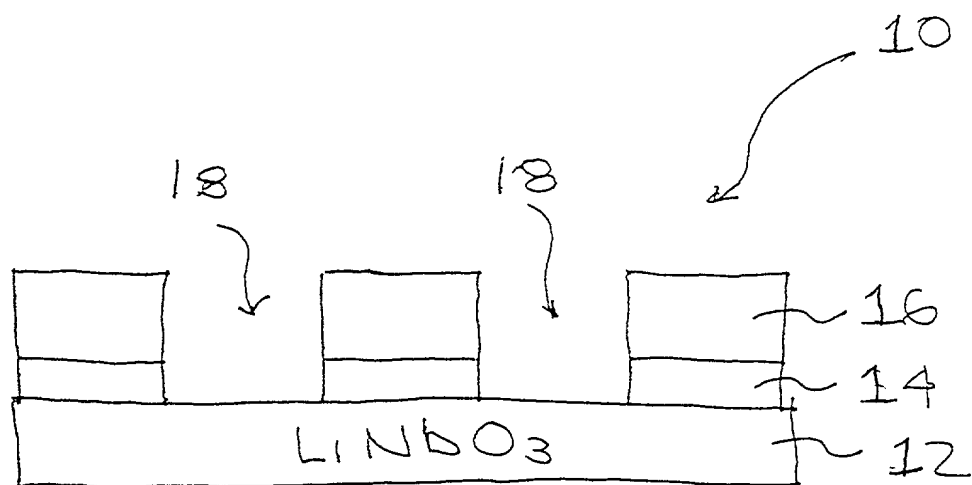


FIG. 1C

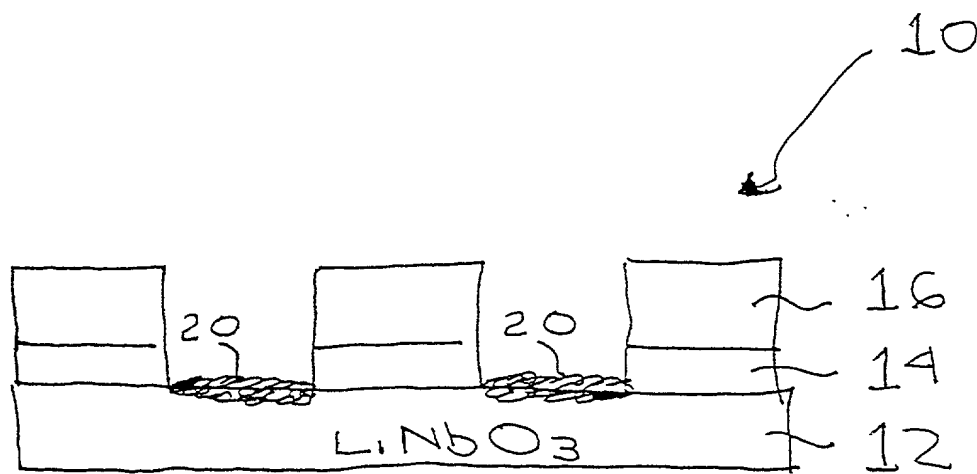


FIG. 1D

665107 2464460

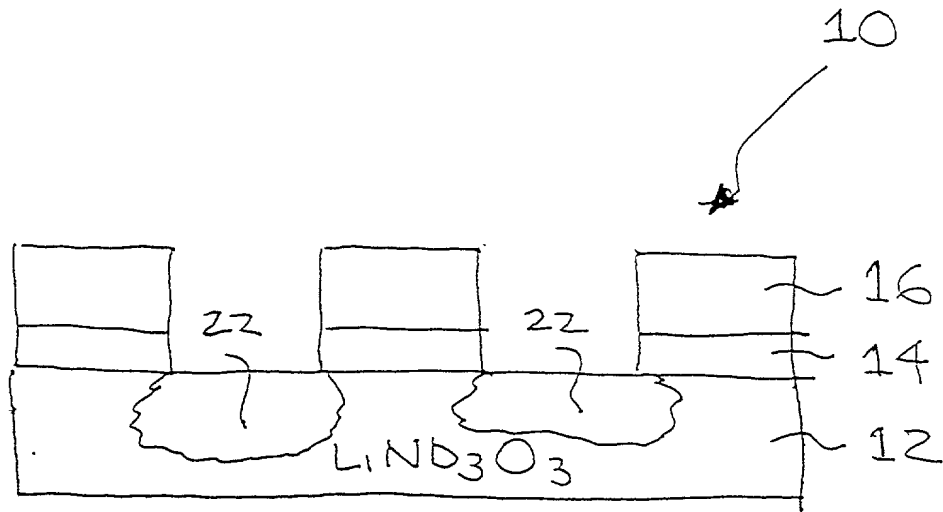


FIG. 1E

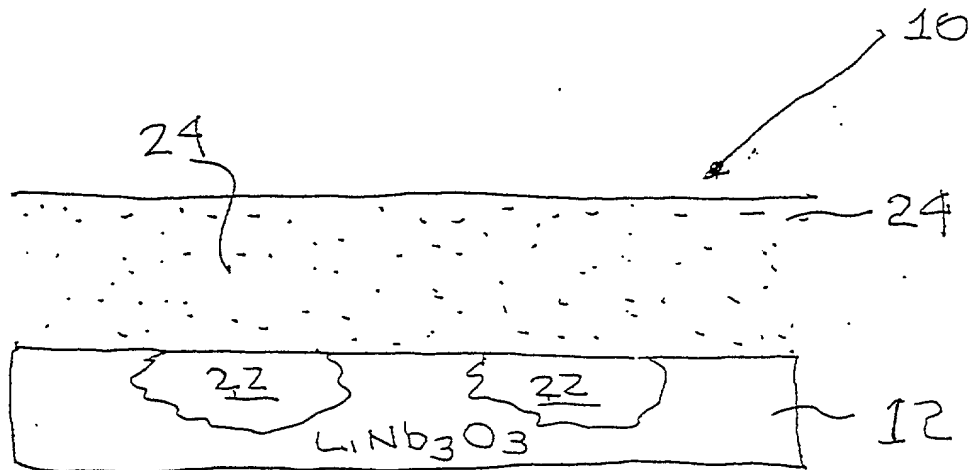


FIG. 1F

669707 2465460

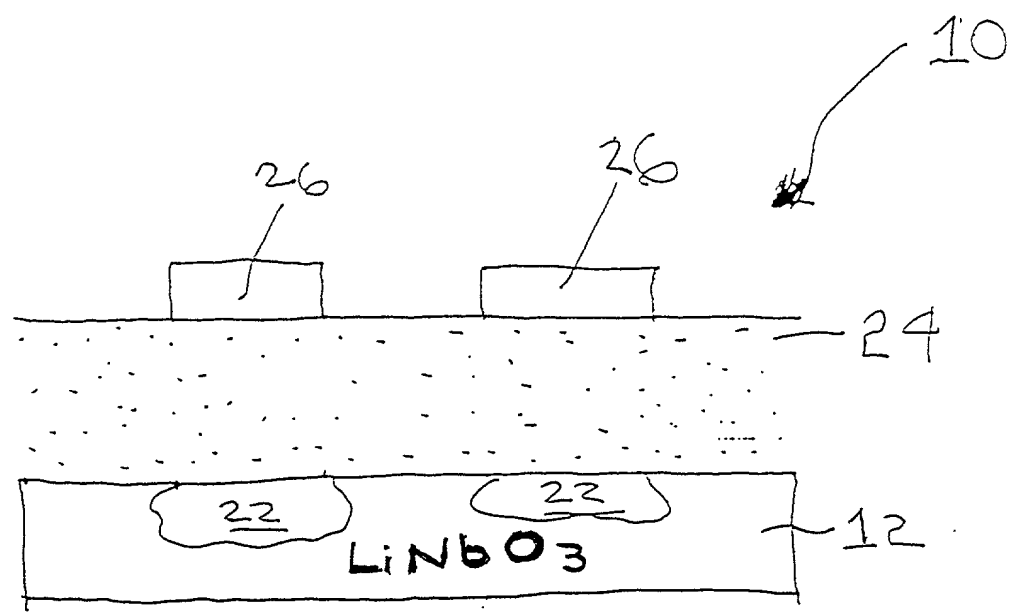


FIG. 1G

00449347 104599

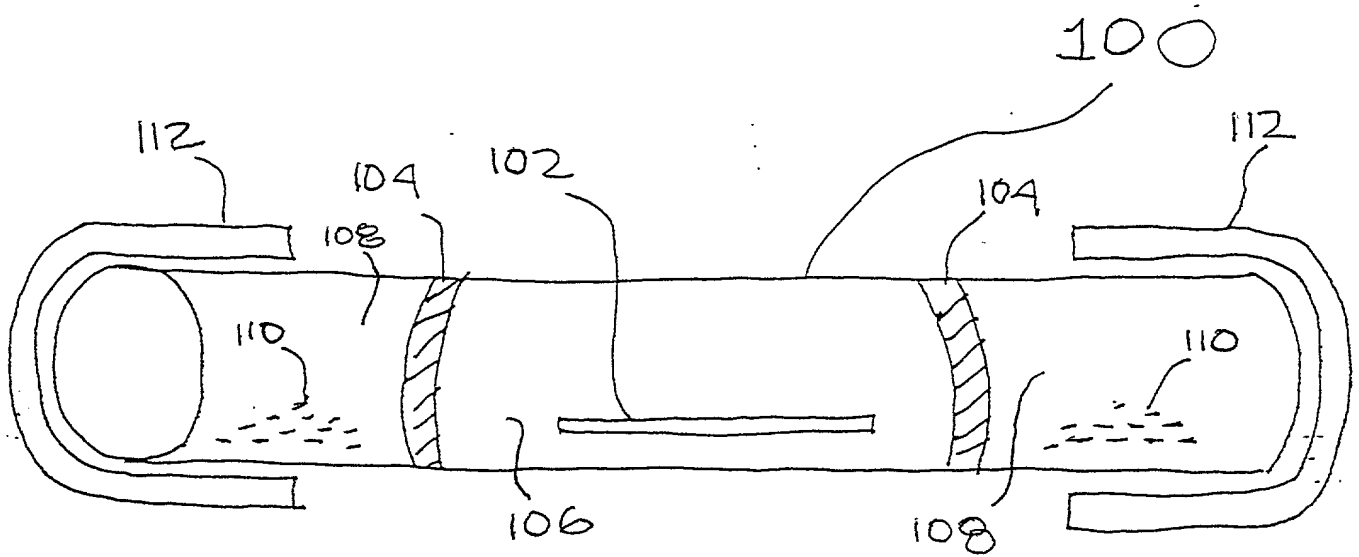


FIG - 2A

665707 241567460
11

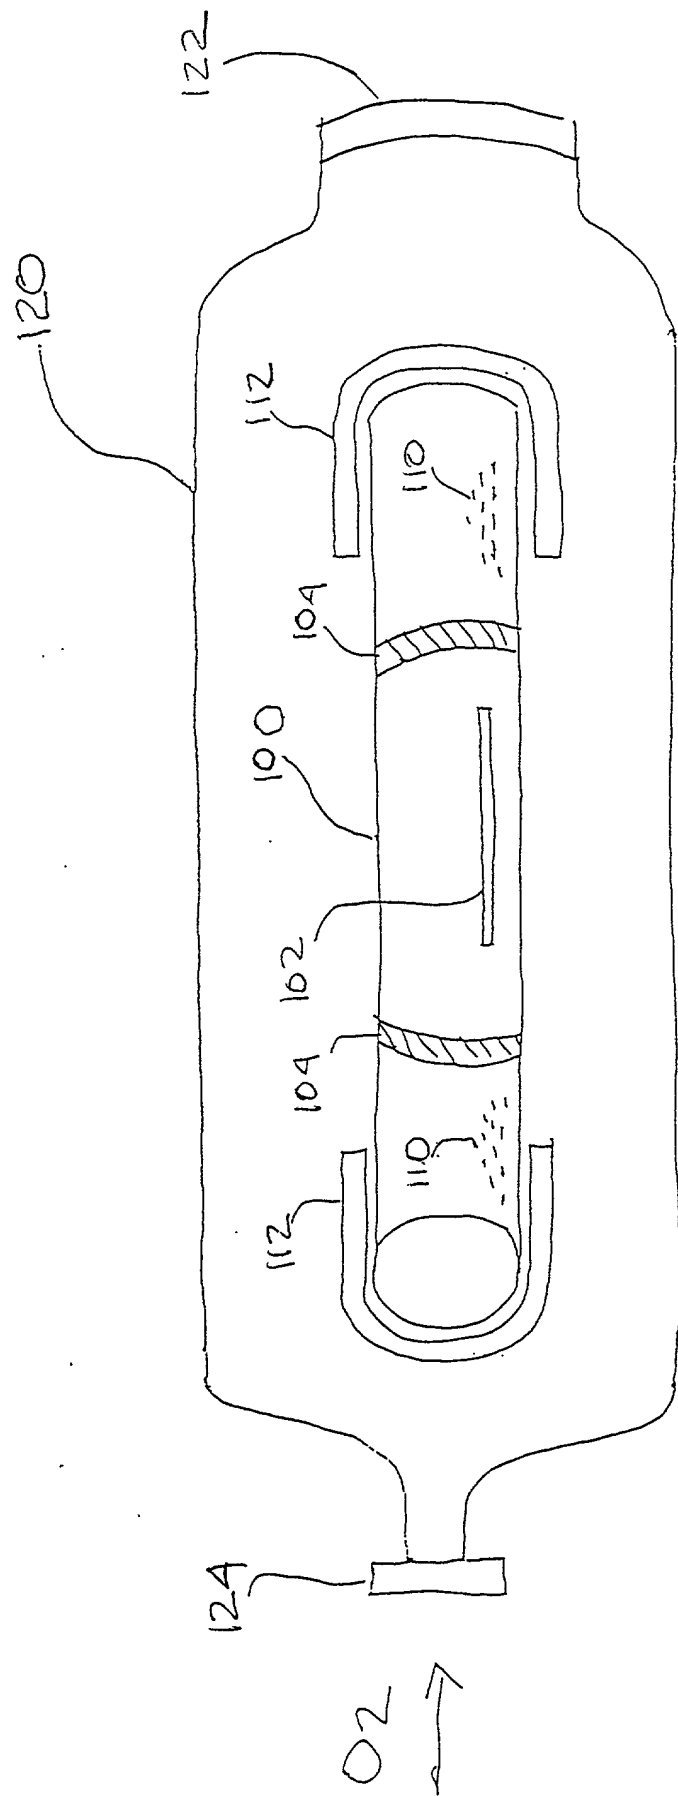
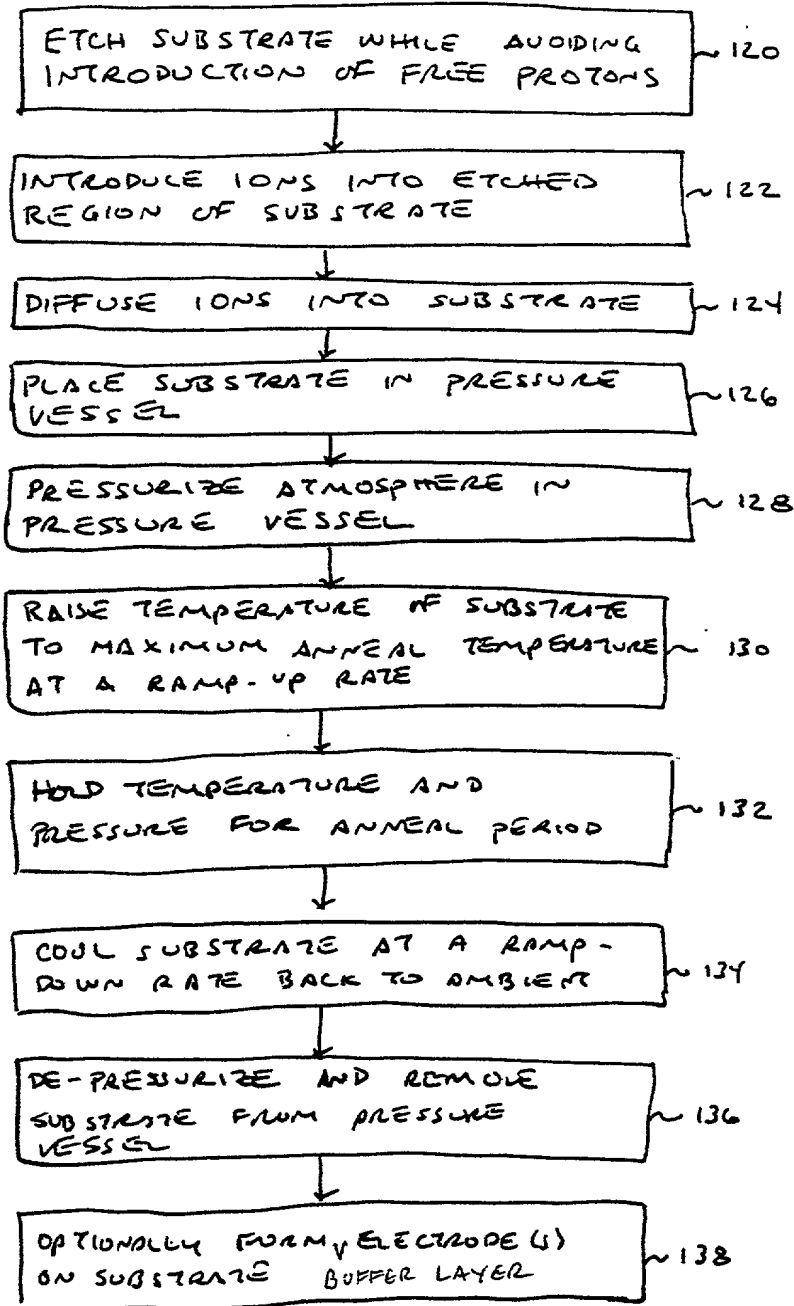


FIG. 2B

FIG. 3

09419347-104599